

# Технические характеристики башенного крана ZTM ZTL286-14

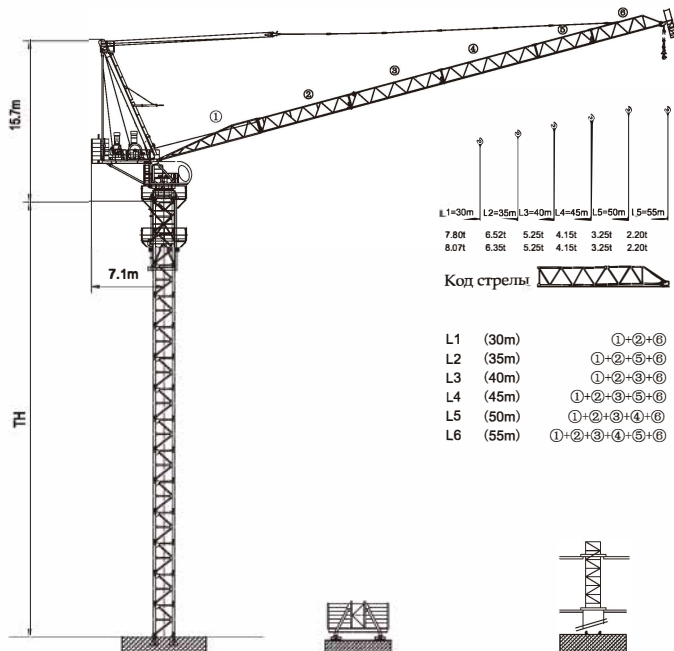


Диаграмма грузоподъемности

| R (m) | Запасовка каната | R (Cmax) (m) | Cmax (t) | 15    | 20    | 25    | 30   | 35   | 40   | 45   | 50   | 55   |
|-------|------------------|--------------|----------|-------|-------|-------|------|------|------|------|------|------|
| 55    | II               | 29.00        | 7.00     | 7.00  | 7.00  | 7.00  | 6.90 | 5.70 | 4.50 | 3.50 | 2.80 | 2.20 |
| 50    | II               | 30.50        | 7.00     | 7.00  | 7.00  | 7.00  | 7.00 | 6.10 | 4.90 | 4.00 | 3.25 |      |
|       | IV               | 23.50        | 10.00    | 10.00 | 10.00 | 9.20  | 6.90 | 5.40 | 4.30 | 3.40 | 2.70 |      |
| 45    | II               | 32.50        | 7.00     | 7.00  | 7.00  | 7.00  | 7.00 | 6.35 | 5.15 | 4.15 |      |      |
|       | IV               | 18.70        | 14.00    | 14.00 | 12.80 | 9.50  | 7.40 | 5.80 | 4.60 | 3.70 |      |      |
| 40    | II               | 33.10        | 7.00     | 7.00  | 7.00  | 7.00  | 7.00 | 6.52 | 5.25 |      |      |      |
|       | IV               | 18.80        | 14.00    | 13.00 | 9.60  | 7.50  | 5.80 | 4.75 |      |      |      |      |
| 35    | II               | 33.40        | 7.00     | 7.00  | 7.00  | 7.00  | 6.52 |      |      |      |      |      |
|       | IV               | 19.20        | 14.00    | 14.00 | 13.40 | 9.80  | 7.60 | 6.00 |      |      |      |      |
| 30    | II               | 30.00        | 7.00     | 7.00  | 7.00  | 7.00  |      |      |      |      |      |      |
|       | IV               | 20.00        | 14.00    | 14.00 | 14.00 | 10.00 | 7.80 |      |      |      |      |      |






Диаграмма грузоподъемности


| R (m) | Запасовка каната | R (Cmax) (m) | Cmax (t) | 15    | 20    | 25    | 30   | 35   | 40   | 45   | 50   | 55   |
|-------|------------------|--------------|----------|-------|-------|-------|------|------|------|------|------|------|
| 55    | II               | 34.57        | 6.00     | 6.00  | 6.00  | 6.00  | 6.00 | 5.87 | 4.62 | 3.63 | 2.85 | 2.20 |
| 50    | II               | 36.54        | 6.00     | 6.00  | 6.00  | 6.00  | 6.00 | 6.00 | 5.12 | 4.08 | 3.25 |      |
|       | IV               | 25.86        | 10.00    | 10.00 | 10.00 | 10.00 | 8.04 | 6.28 | 4.95 | 3.91 | 3.08 |      |
| 45    | II               | 36.84        | 6.00     | 6.00  | 6.00  | 6.00  | 6.00 | 6.00 | 5.20 | 4.15 |      |      |
|       | IV               | 22.84        | 12.00    | 12.00 | 12.00 | 10.61 | 8.14 | 6.36 | 5.03 | 3.98 |      |      |
| 40    | II               | 37.05        | 6.00     | 6.00  | 6.00  | 6.00  | 6.00 | 6.00 | 5.25 |      |      |      |
|       | IV               | 22.97        | 12.00    | 12.00 | 12.00 | 10.69 | 8.21 | 6.43 | 5.08 |      |      |      |
| 35    | II               | 35.00        | 6.00     | 6.00  | 6.00  | 6.00  | 6.00 | 6.00 |      |      |      |      |
|       | IV               | 22.81        | 12.00    | 12.00 | 12.00 | 10.59 | 8.12 | 6.35 |      |      |      |      |
| 30    | II               | 30.00        | 6.00     | 6.00  | 6.00  | 6.00  | 6.00 |      |      |      |      |      |
|       | IV               | 22.71        | 12.00    | 12.00 | 12.00 | 10.52 | 8.07 |      |      |      |      |      |



## Мачта L68B3 Нагрузки (реакции) опоры мачты



| Ø2.0m-FB68A                                                                       |        |       |      |      |      |      |
|-----------------------------------------------------------------------------------|--------|-------|------|------|------|------|
|  | (m)    | 30-35 | 40   | 45   | 50   | 55   |
|  | (m)    | 51.2  | 48.2 | 45.2 | 42.2 | 39.2 |
| 3.0m                                                                              | L68B3  | 10    | 9    | 8    | 7    | 6    |
| 3.0m                                                                              | L68B3S | 2     | 2    | 2    | 2    | 2    |
| 7.5m                                                                              | L68G   | 1     | 1    | 1    | 1    | 1    |
| 7.5m                                                                              | L68J   | 1     | 1    | 1    | 1    | 1    |
| F2(t)                                                                             | ●      | 136   | 137  | 138  | 139  | 140  |
|                                                                                   | ■      | 226   | 227  | 228  | 229  | 230  |
| F3(t)                                                                             | ●      | 92    | 93   | 94   | 95   | 96   |
|                                                                                   | ■      | 184   | 185  | 186  | 187  | 188  |
|  | (t)    | 69    |      |      |      |      |



| Ø2.0m-DDJ68P                                                                        |        |       |      |      |      |      |
|-------------------------------------------------------------------------------------|--------|-------|------|------|------|------|
|    | (m)    | 30-35 | 40   | 45   | 50   | 55   |
|    | (m)    | 43.7  | 40.7 | 37.7 | 34.7 | 31.7 |
| 3.0m                                                                                | L68B3  | 8     | 7    | 6    | 5    | 4    |
| 3.0m                                                                                | L68B3S | 2     | 2    | 2    | 2    | 2    |
| 7.5m                                                                                | L68G   | 1     | 1    | 1    | 1    | 1    |
| 7.5m                                                                                | L68J   | 1     | 1    | 1    | 1    | 1    |
| F1(t)                                                                               | ●      | 90    | 91   | 92   | 93   | 94   |
|                                                                                     | ■      | 119   | 120  | 121  | 122  | 123  |
|  | (t)    | 84    |      |      |      |      |


● В рабочем состоянии

■ В нерабочем состоянии

⚙️ Общий вес крана в свободном состоянии (без учета противовеса и балласта)

★ Выбирая оптимальную секцию мачты (L68A1/L68B1/L68B2), обратитесь к нам за консультацией






Габариты внутреннего  
отверстия для подъема  
башенного крана

| Ø 2.0m-BA68A                                                                          |       |       |      |      |      |      |
|---------------------------------------------------------------------------------------|-------|-------|------|------|------|------|
|  (m) |       | 30-35 | 40   | 45   | 50   | 55   |
| H <sub>1</sub>                                                                        | (m)   | 37.5  | 34.5 | 31.5 | 28.5 | 25.5 |
| 3.0m                                                                                  | L68B3 | 10    | 9    | 8    | 7    | 6    |
| 3.0m                                                                                  | L68C  | 2     | 2    | 2    | 2    | 2    |
| 1.5m                                                                                  | L68D  | 1     | 1    | 1    | 1    | 1    |
| A1(m)                                                                                 | P(t)  | R(t)  | X(m) | Y(m) |      |      |
| 12                                                                                    | 89    | 30    | 2.58 | 2.17 |      |      |

## Подъемная стрела

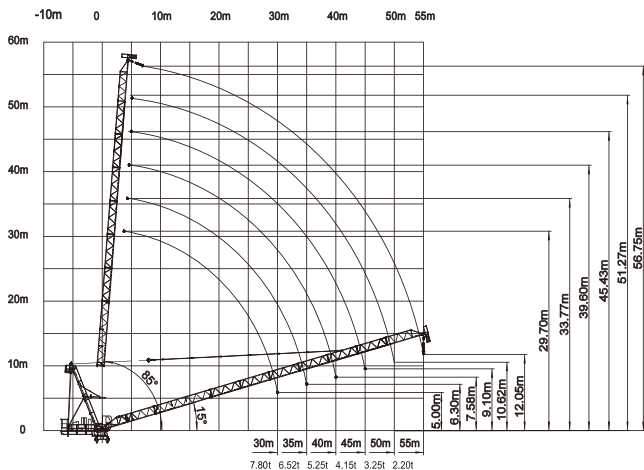

## Спецификации

| Механизм                                                                         |          |         |  |                   |  |                    |  | Мощность двигателя kW |
|----------------------------------------------------------------------------------|----------|---------|-----------------------------------------------------------------------------------|-------------------|-----------------------------------------------------------------------------------|--------------------|-----------------------------------------------------------------------------------|-----------------------|
|                                                                                  |          |         | m/min                                                                             | t                 | m/min                                                                             | t                  |                                                                                   |                       |
|  | 14t      | 75LVF35 | 0-42.5<br>0-64<br>0-85                                                            | 7.0<br>4.6<br>2.4 | 0-21<br>0-32<br>0-42.5                                                            | 14.0<br>9.2<br>4.8 | 690<br>>690m ☆                                                                    | 55                    |
|                                                                                  | 12t      | 55LVF30 | 0-37.5<br>0-57<br>0-90                                                            | 6.0<br>4.0<br>1.7 | 0-19<br>0-29<br>0-45                                                              | 12.0<br>8.0<br>3.4 | 600m                                                                              | 45                    |
|  | 60DVF30K |         | 15° - 85° 2.2min                                                                  |                   |                                                                                   |                    |                                                                                   | 45                    |
|  | RVF7.5   |         | 0-0.7 rpm                                                                         |                   |                                                                                   |                    |                                                                                   | 2×5.5                 |
|  | RT       |         | 12.5-25 m/min                                                                     |                   |                                                                                   |                    |                                                                                   | 4×2.6/5.2             |

|  Напряжение | kVA |
|----------------------------------------------------------------------------------------------|-----|
| 380V (±10%) 50Hz                                                                             | 135 |

☆ Обратитесь за консультацией

Данная спецификация не является юридическим документом. Для получения точной технической информации, пожалуйста, обратитесь к соответствующим инструкциям или свяжитесь с дистрибьютором.