

Технические характеристики башенного крана ZTM ZTT1160-50

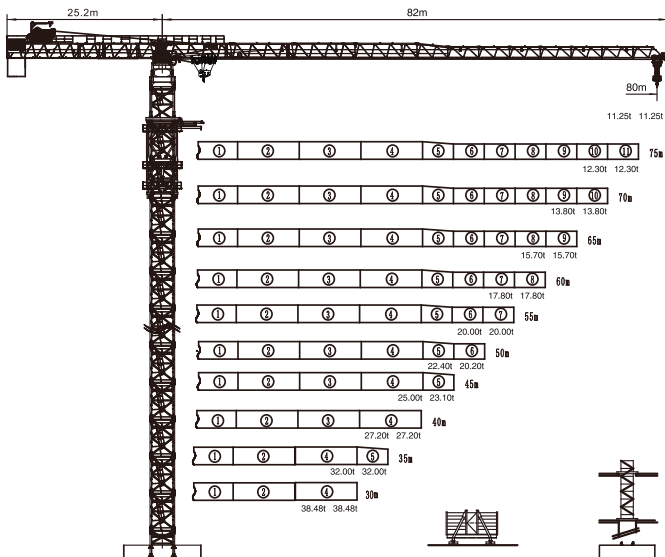


Диаграмма грузоподъемности Двойная кареточная тележка

R (m)	Запасовка вагона	R (Сmax) (m)	Сmax (t)	20	25	30	35	40	45	50	55	60	65	70	75	80
80	II	41.10	25.00	25.00	25.00	25.00	25.00	25.00	22.51	19.91	17.79	16.04	14.56	13.29	12.20	11.25
	IV	21.50	50.00	50.00	41.82	33.61	27.86	23.60	20.31	17.71	15.59	13.84	12.36	11.09	10.00	9.05
75	II	41.36	25.00	25.00	25.00	25.00	25.00	25.00	22.68	20.06	17.93	16.16	14.67	13.40	12.30	
	IV	21.63	50.00	50.00	42.12	33.86	28.07	23.78	20.48	17.86	15.73	13.96	12.47	11.20	10.10	
70	II	42.35	25.00	25.00	25.00	25.00	25.00	25.00	23.31	20.62	18.44	16.63	15.10	13.80		
	IV	22.13	50.00	50.00	43.29	34.83	28.89	24.50	21.11	18.42	16.24	14.43	12.90	11.60		
65	II	43.72	25.00	25.00	25.00	25.00	25.00	25.00	24.18	21.41	19.15	17.28	15.70			
	IV	22.82	50.00	50.00	44.90	36.16	30.02	25.48	21.98	19.21	16.95	15.08	13.50			
60	II	44.82	25.00	25.00	25.00	25.00	25.00	25.00	24.89	22.04	19.72	17.80				
	IV	23.38	50.00	50.00	46.21	37.23	30.94	26.28	22.69	19.84	17.52	15.60				
55	II	45.36	25.00	25.00	25.00	25.00	25.00	25.00	25.00	22.35	20.00					
	IV	23.65	50.00	50.00	46.84	37.76	31.38	26.66	23.03	20.15	17.80					
50	II	45.46	25.00	25.00	25.00	25.00	25.00	25.00	25.00	25.00	22.40					
	IV	23.70	50.00	50.00	46.96	37.85	31.46	26.73	23.09	20.20						
45	II	45.00	25.00	25.00	25.00	25.00	25.00	25.00	25.00							
	IV	23.71	50.00	50.00	46.97	37.86	31.47	26.74	23.10							
40	II	40.00	25.00	25.00	25.00	25.00	25.00	25.00								
	IV	24.03	50.00	50.00	47.72	38.48	32.00	27.20								
35	II	35.00	25.00	25.00	25.00	25.00	25.00									
	IV	24.03	50.00	50.00	47.72	38.48	32.00									
30	II	30.00	25.00	25.00	25.00	25.00										
	IV	24.03	50.00	50.00	47.72	38.48										






Диаграмма грузоподъемности Двойная кареточная тележка

R (m)	Запасовка вагона	R (Сmax) (m)	Сmax (t)	20	25	30	35	40	45	50	55	60	65	70	75	80
80	II	49.81	20.00	20.00	20.00	20.00	20.00	20.00	20.00	19.91	17.79	16.04	14.56	13.29	12.20	11.25
	IV	25.95	40.00	40.00	40.00	33.61	27.86	23.60	20.31	17.71	15.59	13.84	12.36	11.09	10.00	9.05
75	II	50.12	20.00	20.00	20.00	20.00	20.00	20.00	20.00	20.00	17.93	16.16	14.67	13.40	12.30	
	IV	26.11	40.00	40.00	40.00	33.86	28.07	23.78	20.48	17.86	15.73	13.96	12.47	11.20	10.10	
70	II	51.33	20.00	20.00	20.00	20.00	20.00	20.00	20.00	20.00	18.44	16.63	15.10	13.80		
	IV	26.72	40.00	40.00	40.00	34.83	28.89	24.50	21.11	18.42	16.24	14.43	12.90	11.60		
65	II	53.00	20.00	20.00	20.00	20.00	20.00	20.00	20.00	20.00	19.15	17.28	15.70			
	IV	27.56	40.00	40.00	40.00	36.16	30.02	25.48	21.98	19.21	16.95	15.08	13.50			
60	II	54.34	20.00	20.00	20.00	20.00	20.00	20.00	20.00	20.00	20.00	17.80				
	IV	28.24	40.00	40.00	40.00	37.23	30.94	26.28	22.69	19.84	17.52	15.60				
55	II	55.00	20.00	20.00	20.00	20.00	20.00	20.00	20.00	20.00	20.00					
	IV	28.58	40.00	40.00	40.00	37.76	31.38	26.66	23.03	20.15	17.80					
50	II	55.12	20.00	20.00	20.00	20.00	20.00	20.00	20.00	20.00						
	IV	28.64	40.00	40.00	40.00	37.85	31.46	26.73	23.09	20.20						
45	II	45.00	20.00	20.00	20.00	20.00	20.00	20.00	20.00							
	IV	28.65	40.00	40.00	40.00	37.86	31.47	26.74	23.10							
40	II	40.00	20.00	20.00	20.00	20.00	20.00	20.00								
	IV	29.04	40.00	40.00	40.00	38.48	32.00	27.20								
35	II	35.00	20.00	20.00	20.00	20.00										
	IV	29.04	40.00	40.00	40.00	38.48	32.00									
30	II	30.00	20.00	20.00	20.00											
	IV	29.04	40.00	40.00	40.00	38.48										




Мачта ZL35 Нагрузки (реакции) опоры мачты

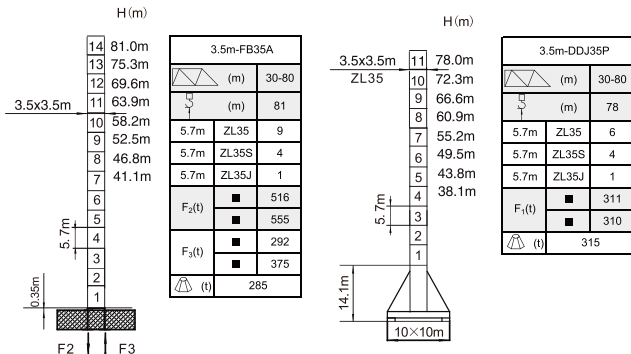

Опорные крепления
Высота крепления крана
Мачта ZL35

При необходимости дальнейшего увеличения высоты
необходимо связаться с эксклюзивным дистрибьютором

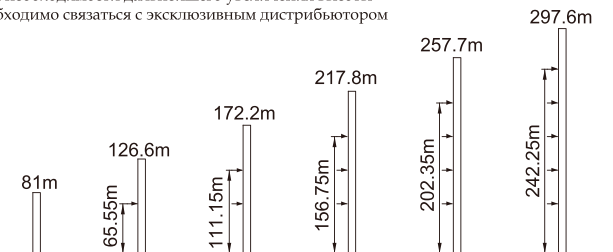

Спецификации

Механизм								Мощность двигателя kW
			m/min	t	m/min	t		
	50t	200LVF125	0-20 0-60 0-80	25.0 6.5 2.5	0-10 0-30 0-40	50.0 13.0 5.0	900m >900m ★	160
	40t	139LVF100BA1	0-32 0-64 0-120	20.0 8.0 1.5	0-16 0-32 0-60	40.0 16.0 3.0	1100m	139
	18JXF20		0-70 m/min					18.5
	RVF9.0		0-0.6 rpm					4x9.0
	RT		12.5-25 m/min					4x7.5

Напряжение	kVA
380V (±10%) 50Hz	200LVF125: 285 139LVF100BA1:257

★ Обратитесь за консультацией

Данная спецификация не является юридическим документом. Для получения точной технической информации, пожалуйста, обратитесь к соответствующим инструкциям или свяжитесь с дистрибьютором.